



DIMENSIONS

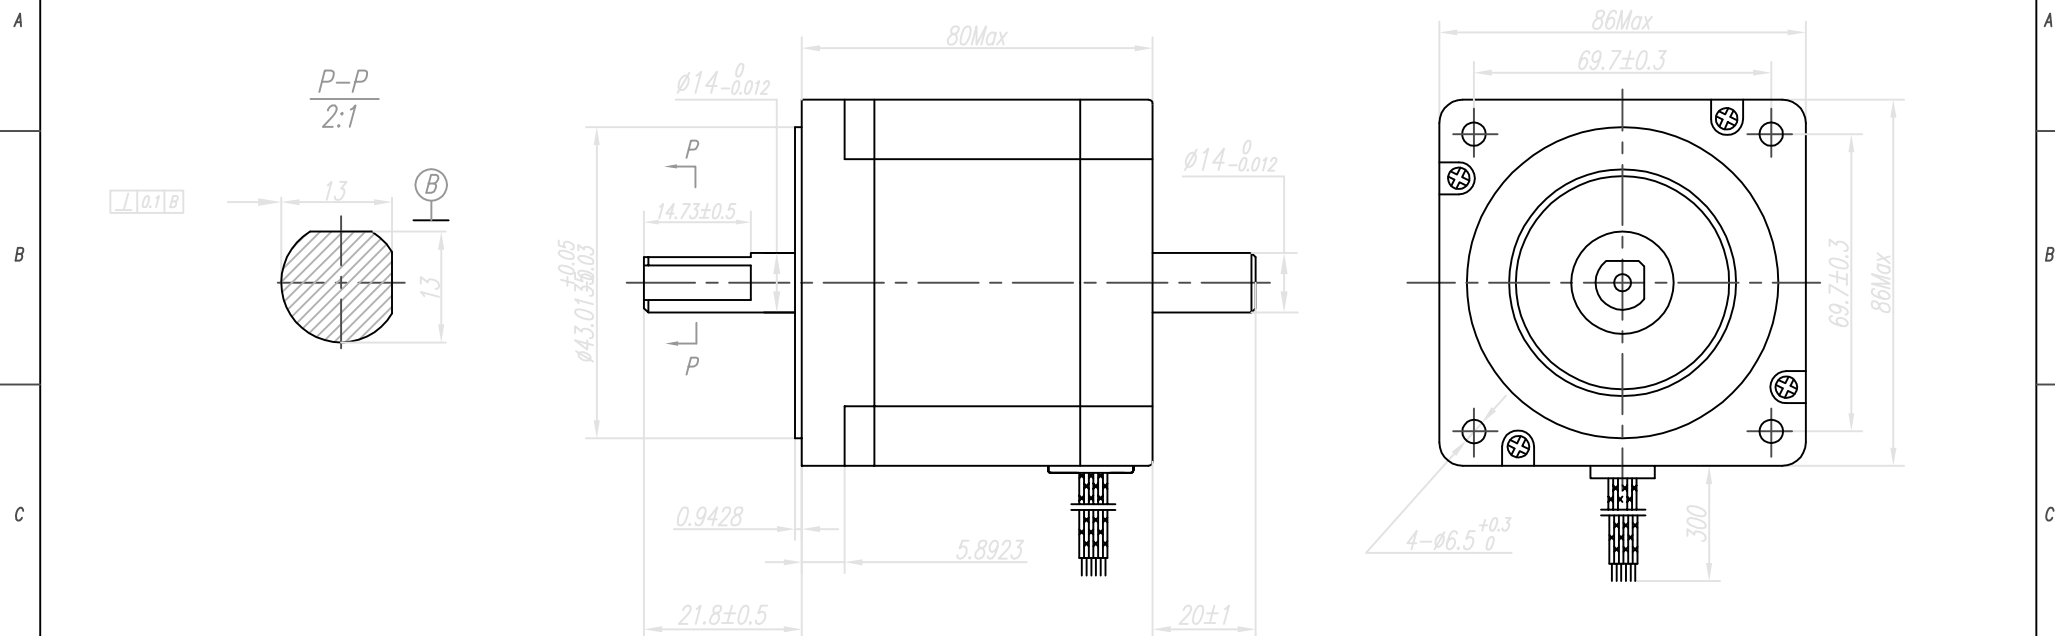

SPECIFICATIONS unit=mm

COLORS OF LEAD WIRES BIPOLAR & UNI-POLAR

PHASE	2	PHASE		
STEP ANGLE	1.8±5%	°/STEP		
DETENT TORQUE	6.0	N.cm Max		
INSULATION CLASS	B			
LEAD STYLE	AWG20 UL1007			
	UNIPOLAR RESP.ONE WINDING	BIPOLAR RESP.BIPOLAR SERIAL	BIPOLAR ONLY PARALLEL	
CURRENT	3.53 A/PHASE	2.5 A/PHASE	5.0 A/PHASE	
RESISTANCE	0.8 ±10% Ω/PHASE	1.6 ±10% Ω/PHASE	0.4 ±10% Ω/PHASE	
INDUCTANCE	3.2 ±20% mH/PHASE	12.8±20% mH/PHASE	3.2 ±20% mH/PHASE	
HOLDING TOGQUE	300 N.cm Min	420 N.cm Min	420 N.cm Min	

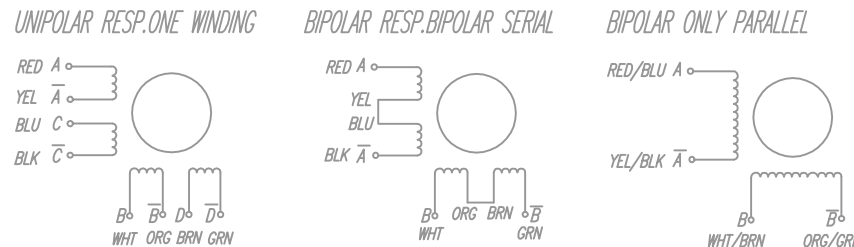

DATE 20070106
EDIT A



www.machinet.com.ar

REV	QTY.	NO.	SIG.	DT.
DESIGN		20070106	CHECK	
PROC.			APPR.	

CLS.MAK	WEIGHE	SCALE
EDIT.	PAGE	OF PAGES

34HS0835-05