



DIMENSIONS

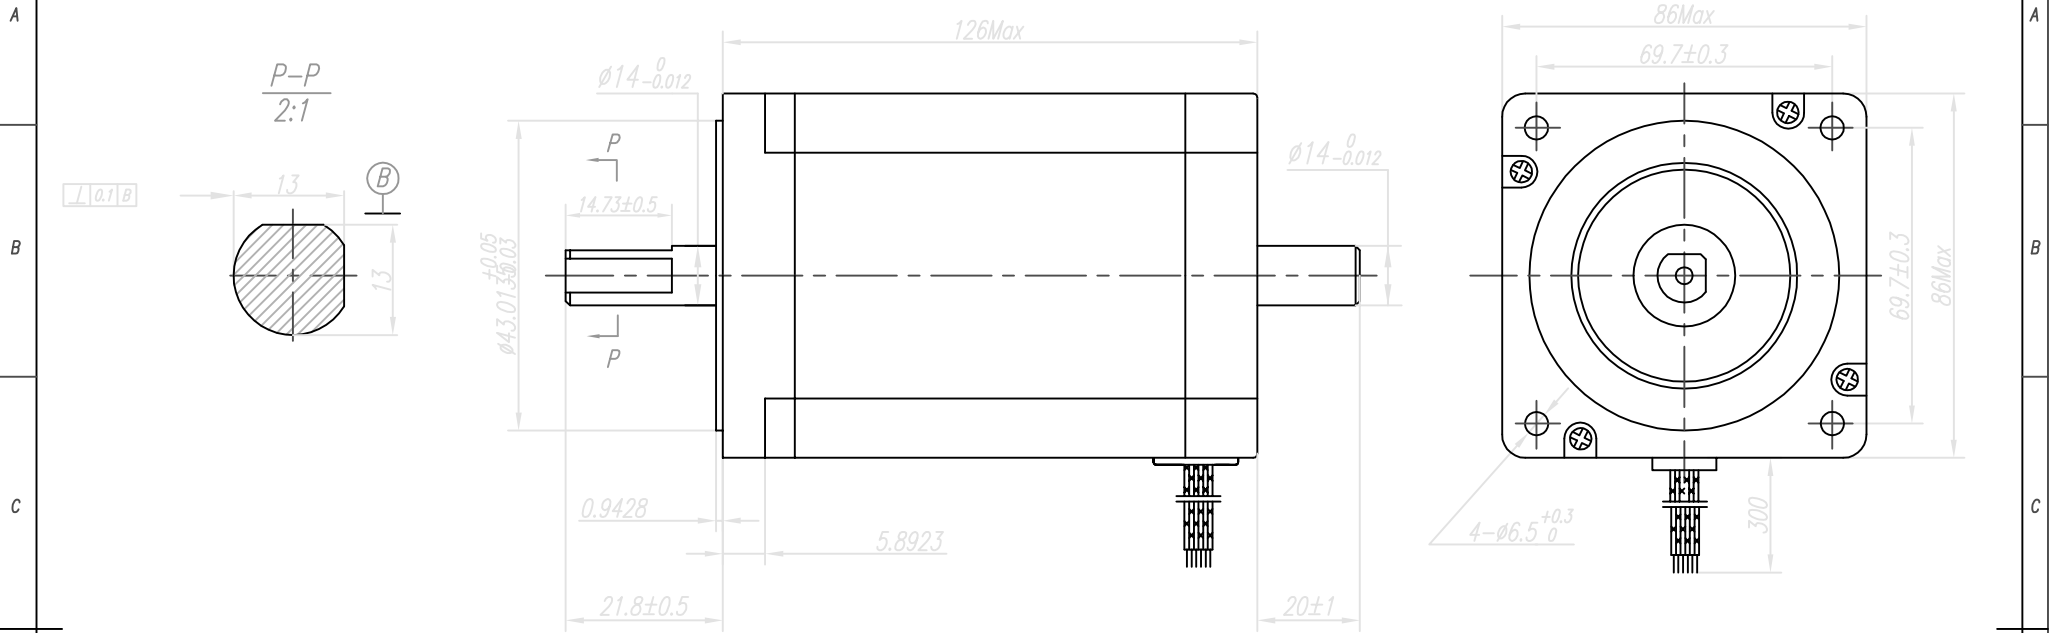

SPECIFICATIONS unit=mm

PHASE	2	PHASE	
STEP ANGLE	1.8±5%	°/STEP	
DETENT TORQUE	18.5	N.cm Max	
INSULATION CLASS	B		
LEAD STYLE	AWG20 UL1007		
	UNIPOLAR RESP.ONE WINDING	BIPOLAR RESP.BIPOLAR SERIAL	BIPOLAR ONLY PARALLEL
CURRENT	3.53 A/PHASE	2.5 A/PHASE	5.0 A/PHASE
RESISTANCE	1.4 ±10% Ω/PHASE	2.8 ±10% Ω/PHASE	0.7 ±10% Ω/PHASE
INDUCTANCE	5.8 ±20% mH/PHASE	23.2 ±20% mH/PHASE	5.8 ±20% mH/PHASE
HOLDING TOGQUE	620 N.cm Min	880 N.cm Min	880 N.cm Min

COLORS OF LEAD WIRES BIPOLAR & UNI-POLAR

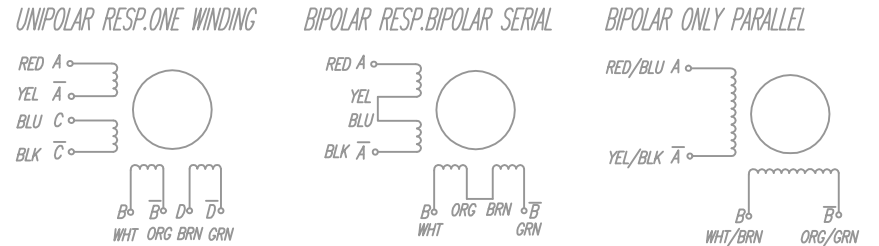

DATE 20070106  
EDIT A



www.machinet.com.ar

REV	QTY.	NO.	SIG.	DT.
DESIGN		20070106	CHECK	
PROC.			APPR.	
CLS.MAK	WEIGHE	SCALE		
EDIT.	PAGE OF	PAGES		

34HS2835-05